




วิธีการตั้งค่า Username Router Zyxel P660HN-T1A

1. ใช้ Browser พิมพ์ 192.168.1.1 ใส่ Password = password (ตัวเล็กทั้งหมด)

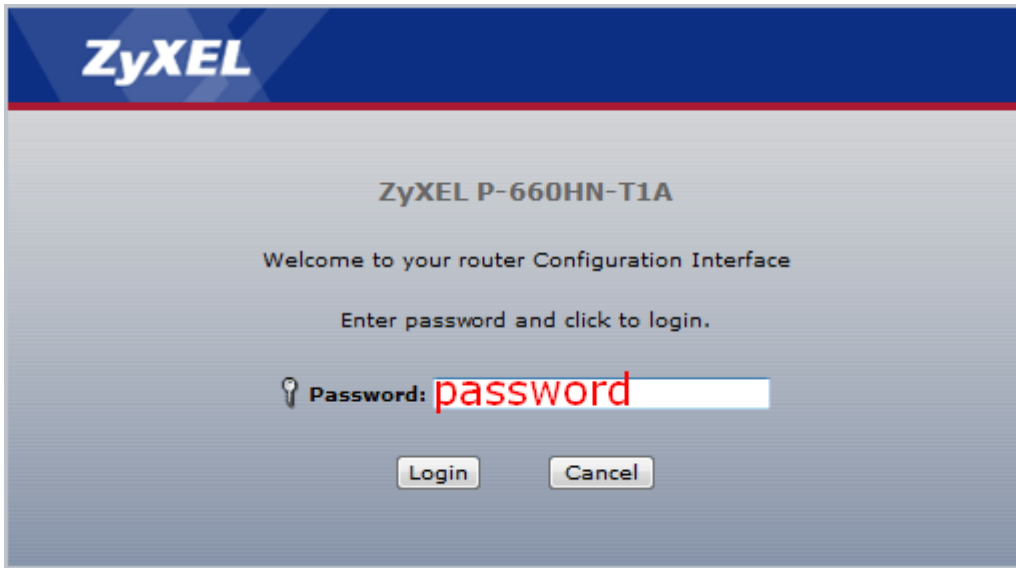

2. ส่วนแรกของ Status

Device Information

Host Name :	P-660HN-T1A
Model Number :	P-660HN-T1A
MAC address :	C816C1871911F2198
ZyNOS Firmware Version :	3.40(U1M_01b20)
DSL Firmware Version :	FwVer:3.16.2.1_A_TC3086 HwVer:T14.F7_7.0
IPv4 WAN Information	
- DSL Mode :	ADSL2+
- Annex Type :	ANNEX A/I/J/L/M
- IP Address :	N/A
- IP Subnet Mask :	N/A
- Default Gateway :	N/A
- VPI/VCI	0 / 100
IPv6 WAN Information	
- DSL Mode :	ADSL2+
- IPv6 Address :	N/A
- Default Gateway :	N/A
- VPI/VCI	0 / 100
IPv4 LAN Information	
- IP Address :	192.168.1.1
- IP Subnet Mask :	255.255.255.0
- DHCP :	Server
IPv6 LAN Information	
- IPv6 Address :	
WLAN Information	
- ESSID :	true_homewifi_NM6
- Channel :	10
- Security :	WEP-64bits
- WPS :	Configured
- Status :	On

System Status

System Uptime :	0:32:19
Current Time :	Sat Jan 1 00:32:18 2000
System Mode :	Routing / Bridging
CPU Usage :	1%
Memory Usage :	58%


Interface Status

Interface	Status	Rate
ADSL	up	24560 kbps / 1179 kbps
LAN	up	100M/Full Duplex
WLAN	Active	150M

Summary

[Client List](#) [Packet Statistics](#)
[WLAN Status](#)


3. Zoom ด้านซ้าย จะแสดง ข้อมูล Device information ต่าง ๆ ของ Router

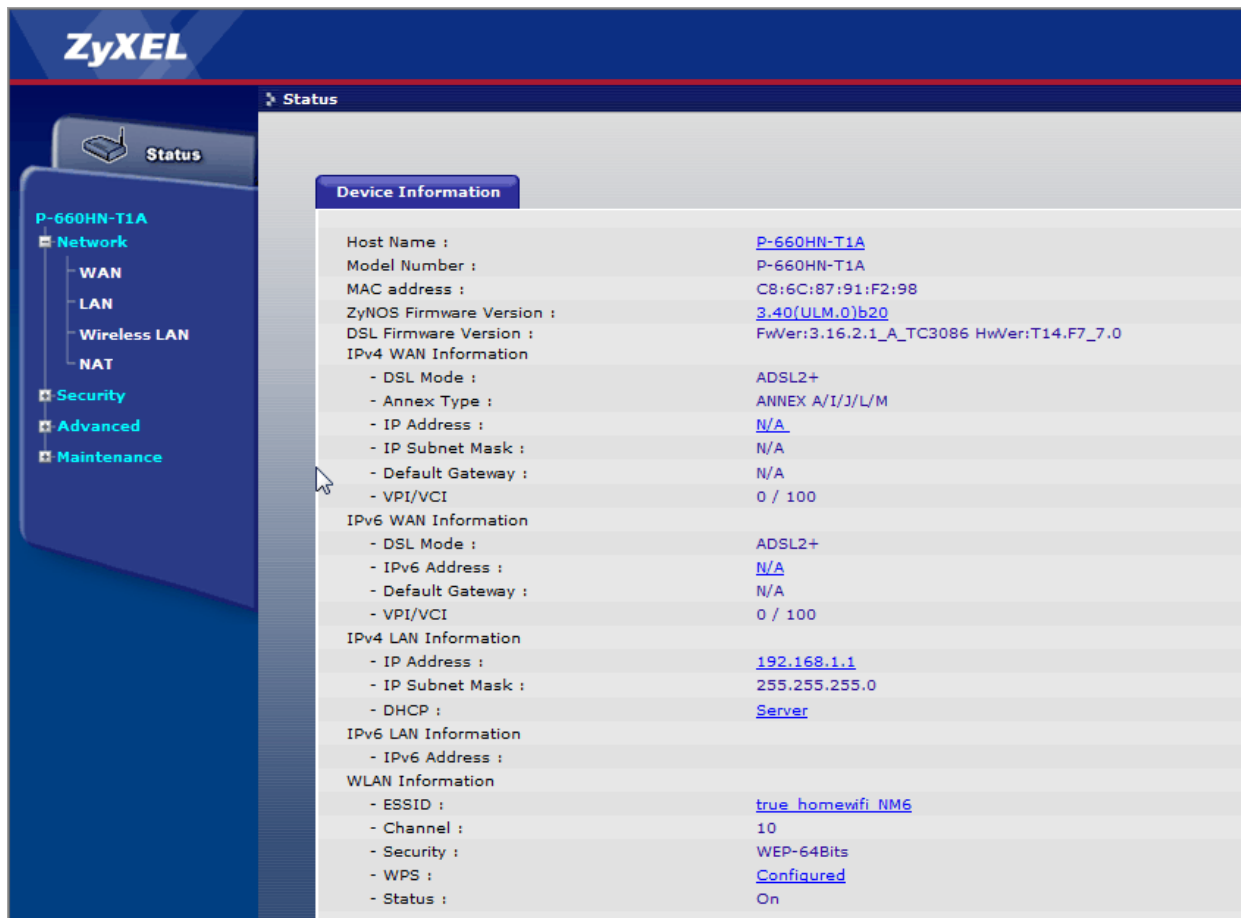

4. ส่วนขวาจะแสดงการเชื่อมต่อ สัญญาณ ADSL รวมถึงค่าการเชื่อมต่อ (Rate)

ตั้งภาพ

Port ปลดปล่อยความเร็ว **Download = 24 M Upload = 1 M**

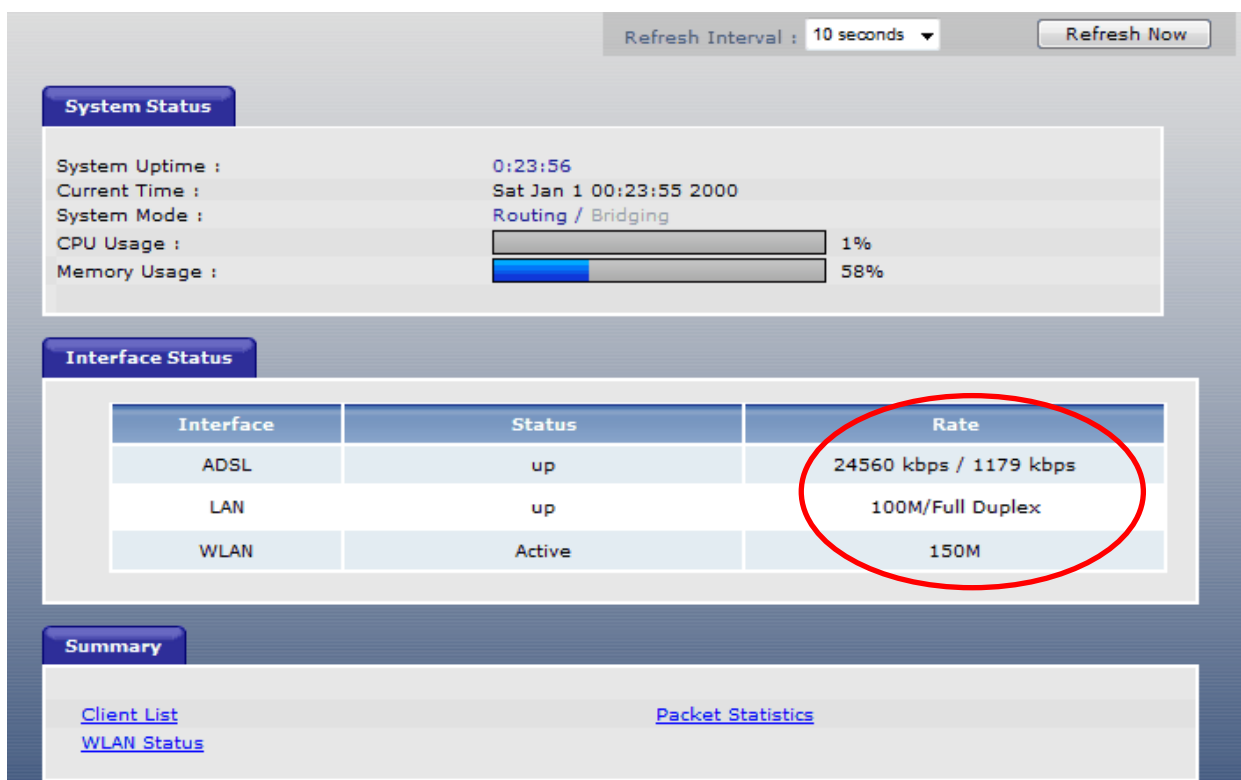

5. การตั้งค่า WAN ให้เลือกดังภาพ จากนั้นกด Apply

Network > WAN > WAN Setup

Internet Connection | More Connections

Line

ADSL Mode: Auto Sync-Up
Annex Type: ANNEX A/I/J/L/M

General

Mode: Routing
Encapsulation: PPPoE
User Name: username ของลูกค้า@truehisp
Password:
Service Name:
Multiplex: LLC
Virtual Circuit ID:
VPI: 0
VCI: 100
PPPoE Passthrough: Activated Deactivated

IP Version

Status | Version: IPv4 IPv4/IPv6

IPv4 address

Obtain an IP Address Automatically
 Static IP Address
IP Address: 0.0.0.0
Subnet Mask: 0.0.0.0
Gateway: 0.0.0.0

IPv6 address

IPv6 Message Fetch Type: Dynamic Mode
DHCP IPv6 Enable: DHCP SLAAC
DHCP PD Enable: Enable Disable
MLD Proxy: Enable Disable

Connection

Keep Alive
 Connect Manually

Apply | **Reset**
Advanced Setup